




**REX 7 the Ultimate FM receiver for ,  
 Conferences, Tour Guide, Assistive Listening.**

**Description**

REX 7 is the most advanced RF body pack receiver on the market ,equipped with 7 preset channels in the 72MHZ frequency range . The included 2 AAA batteries offers 85 hours of battery life, our innovative Tsync technology will help you using the FM receiver in multiple room on the same channel . suitable to use with most headphones of your choice .

THE **GREENER** NEW LOOK in YOUR Conference

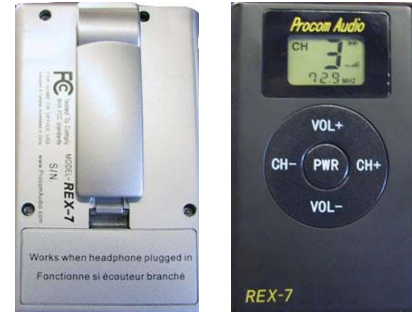

**Technical Data**

Number of channels	7 fixed
RF frequency Range	72.00-75.9
Sensitivity	.6uvtypical . Max 1uv
Frequency accuracy	± .005% stability
Squelch	Automatic
Audio frequency response	45Hz -15Khz
Headphone output level	20mw ,impedance 32 ohm
Working temperature	-5° C up to 60° C

**Features**

<b>Battery Saving Features</b>	Receiver will shut off after 2 minutes if out of signal range Receiver will turn ON only if headphone is plugged Receiver will shut OFF if headphone is unplugged
<b>Display</b>	Backlight Battery Life, Frequency, Channel, Volume & Signal
<b>Controls</b>	Volume Up/Down, Channel Up/Down, Power
<b>USB Plug</b>	Possibility of charging NIMH Batteries
<b>Headphone Plug</b>	3.5" mono or stereo
<b>Battery Life</b>	85 hours in operation with 2 AAA batteries
<b>Color</b>	Front: Black Back: Metallic Silver
<b>Size</b>	W : 2.4 inch W: 0.6 inch L: 2.8 inch
<b>Weight</b>	0.6 lbs with batteries

**Engineering Specifications**

**RF bodypack receiver (FCC Part 15)**

- Frequency range: 72.00 - 75.9 MHz
- Automatic shut off when not in use or out of range from signal
- 7 fixed frequency usable in parallel
- 5 buttons easy control
- LCD display with backlight
- Signal strength & battery indicators
- Included 2 AAA batteries provides 85hours of operation time
- Belt Clip
- Weight including batteries: 0.6 lb